

# Product Data Sheet



## B-POTH 150K

EAN 4047526036607

ID 36608

**Pressed steel fixed castor, medium duty brackets, with top plate fitting, Wheel with thermoplastic polyurethane tread, with heavy nylon wheel centre, non-marking, non-staining**

### Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

### Wheels:

Made of high-quality thermoplastic polyurethane, high operational comfort, low-noise operation, low rolling and swivelling resistance, good floor preservation, very high abrasion resistance, chemically bonded for an inseparable connection to the wheel centre.

**Tread colours:** dark grey

**Wheel centre/rim:** Made of high-quality, impact-resistant nylon.

**Wheel centre colour:** natural white

**Variant:** non-marking, non-staining



### Rolling resistance

■■■■□ Very good

### Operating noise

■■■■□ Good

### Floor surface preservation


■■■■□ Good

# Product Data Sheet



## Technical data

|                           |  |              |
|---------------------------|--|--------------|
| Plate size                |  | 140 x 110    |
| Bolt hole spacing         |  | 105 x 75-80  |
| Bolt hole Ø               |  | 11           |
| Wheel Ø                   |  | 150 mm (D)   |
| Wheel width               |  | 45 mm (T2)   |
| Load capacity             |  | 400 kg       |
| Total height              |  | 190 mm (H)   |
| unit weight               |  | 1,5 kg       |
| Temperature resistance to |  | -25 ° C      |
| Temperature resistance to |  | 70 ° C       |
| tread and tyre hardness   |  | 94° Shore A  |
| Bearing type              |  | Ball bearing |

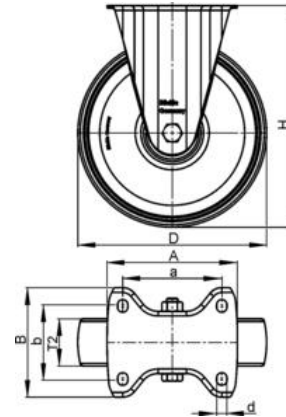

# Product Data Sheet



## Variants



### **B-POTH 150K-FA**

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Wheel with thermoplastic polyurethane tread, with heavy nylon wheel centre