

Product Data Sheet



B-P 265R

EAN 4047526040529

ID 40527

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Wheel with pneumatic tyres, with pressed steel rim

Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

Wheels:

Pneumatic tyre with tube, outstandingly high operational comfort, exceptionally high floor preservation, PAH conform acc. to EU directive 2005/69/EC.

Tread colours: black

Wheel centre/rim:

Made of pressed steel, with tubular steel hub, zinc-plated, blue-passivated, Cr6-free. Tyre mounted on rim.

Wheel centre colour: silver



Rolling resistance

■ ■ ■ □ □ Good

Operating noise

■ ■ ■ ■ ■ Excellent

Floor surface preservation


■ ■ ■ ■ ■ Excellent

Product Data Sheet



Technical data

Profile		Rillenprofil
Plate size		220 x 130
Bolt hole spacing		190 x 75
Bolt hole Ø		15
Wheel Ø		260 mm (D)
Wheel width		85 mm (T2)
Load capacity		250 kg
Total height		308 mm (H)
Profile ribbed profile		R01
unit weight		4,1 kg
Temperature resistance to		-25 ° C
Temperature resistance to		50 ° C
tread and tyre hardness		65° Shore A
Bearing type		Roller bearing

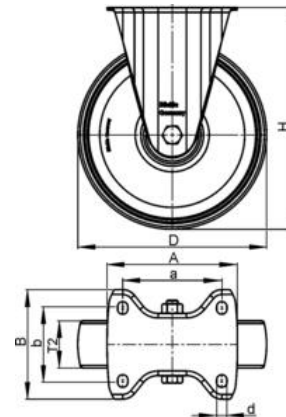

Product Data Sheet



Variants



B-P 265R-SG

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Wheel with pneumatic tyres, with pressed steel rim