

Product Data Sheet



LS-SVS 100K

EAN 4047526608743

ID 608745

Welded steel heavy duty swivel castor, strong swivel head design, Extra heavy duty solid steel wheel

Bracket:

Particularly rugged welded steel construction, with axial grooved ball bearing DIN 711 and tapered roller bearing DIN 720 in the swivel head, dust and splash-proof, fitted grease nipple, bolted and secured with a welded very strong central kingpin. Bolted wheel axle. Zinc-plated, yellow-passivated, Cr6-free.

Wheels:

Made of mild steel, with slightly crowned tread and lightly oiled surface, very low rolling and swivelling resistance, smooth running performance on even floors, extremely wear-resistant, particularly high static and dynamic load capacity.

Tread colours: silver

Wheel centre/rim: - Wheel centre colour: silver



Rolling resistance

■■■■■ Excellent

Operating noise

■□□□□ Sufficient

Floor surface preservation


■□□□□ Sufficient

Product Data Sheet



Technical data

Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		100 mm (D)
Wheel width		40 mm (T2)
Load capacity		1700 kg
Total height		145 mm (H)
Offset swivel castor		50 mm
unit weight		5,1 kg
Temperature resistance to		-25 ° C
Temperature resistance to		120 ° C
tread and tyre hardness		190 - 230 HB
Bearing type		Ball bearing

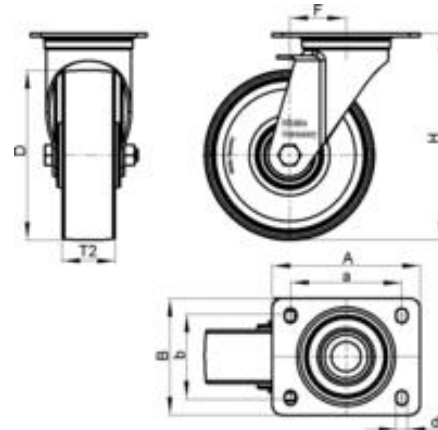

Product Data Sheet



Variants



LS-SVS 100K-RI2

Welded steel heavy duty swivel castor,
strong swivel head design, Extra heavy
duty solid steel wheel



LS-SVS 100K-RI4

Welded steel heavy duty swivel castor,
strong swivel head design, Extra heavy
duty solid steel wheel