

Product Data Sheet



B-POEV 161K

EAN 4047526080327

ID 754170

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Heavy duty wheel with elastic solid rubber tyres 'Blickle EasyRoll', with nylon wheel centre

Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.

Wheels:

Made of high-quality elastic solid rubber, in smooth rolling quality "Blickle EasyRoll", very high operational comfort, low-noise operation, low rolling resistance, very good floor preservation, vulcanised on the wheel centre.

Tread colours: black

Wheel centre/rim:

Made of high-quality, impact-resistant nylon. Vulcanised tyre.

Wheel centre colour: black



Rolling resistance

■■■■□ Very good

Operating noise

■■■■□ Very good

Floor surface preservation


■■■■□ Very good

Product Data Sheet



Technical data

Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		160 mm (D)
Wheel width		40 mm (T2)
Load capacity		320 kg
Total height		195 mm (H)
unit weight		1,4 kg
Temperature resistance		-25 ° C
Temperature resistance to		80 ° C
tread and tyre hardness		65° Shore A
Bearing type		Ball bearing

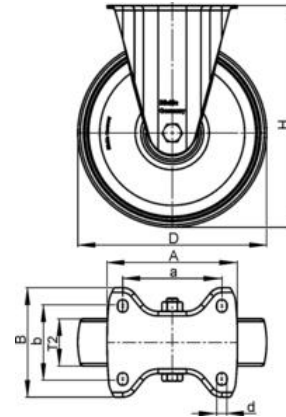

Product Data Sheet



Variants



B-POEV 161K-SG

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Heavy duty wheel with elastic solid rubber tyres 'Blickle EasyRoll', with nylon wheel centre



B-POEV 161KD

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Heavy duty wheel with elastic solid rubber tyres 'Blickle EasyRoll', with nylon wheel centre



B-POEV 161KD-SG

Pressed steel fixed castor, medium duty brackets, with top plate fitting, Heavy duty wheel with elastic solid rubber tyres 'Blickle EasyRoll', with nylon wheel centre