

# Product Data Sheet



## LPXA-PATH 75G

**EAN** 4047526082369

**ID** 754983

**Stainless steel light duty swivel castor with top plate fitting, Wheel with thermoplastic polyurethane tread, with nylon wheel centre**

### Bracket:

Made of pressed high-quality, chromium-nickel stainless steel (Material No. 1.4301/AISI 304), with double ball bearing in the swivel head, strong central kingpin, ball protection by the special top plate and ball disc design. The special Blickle dynamic riveting process of the swivel head results in minimal swivel head play and smooth rolling characteristics with an increased service life achieved by the work hardening of the ball race grooves. All parts incl. axle material are corrosion-resistant. Bolted wheel axle. Vibration-ground finished.



### Wheels:

Made of high-quality thermoplastic polyurethane, low-noise operation, low rolling and swivelling resistance, good floor preservation, very high abrasion resistance, chemically bonded for an inseparable connection to the wheel centre.

**Tread colours:** dark grey

### Wheel centre/rim:

Made of high-quality, impact-resistant nylon. Chemically bonded.

**Wheel centre colour:** grey

### Rolling resistance

■■■■□ Very good

### Operating noise

■■■■□ Good

### Floor surface preservation


■■■■□ Good

# Product Data Sheet



## Technical data

|                           |  |             |
|---------------------------|--|-------------|
| Plate size                |  | 60 x 60     |
| Bolt hole spacing         |  | 38x38/48x48 |
| Bolt hole Ø               |  | 6,2         |
| Wheel Ø                   |  | 75 mm (D)   |
| Wheel width               |  | 25 mm (T2)  |
| Load capacity             |  | 75 kg       |
| Total height              |  | 100 mm (H)  |
| Offset swivel castor      |  | 29 mm       |
| unit weight               |  | 0,3 kg      |
| Temperature resistance to |  | -25 ° C     |
| Temperature resistance to |  | 70 ° C      |
| tread and tyre hardness   |  | 94° Shore A |
| Bearing type              |  | Plain bore  |

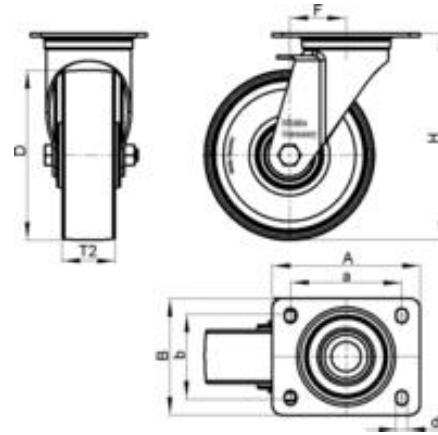

# Product Data Sheet



## Variants



### LPXA-PATH 75G-FI

Stainless steel light duty swivel castor  
with top plate fitting and 'stop-fix' brake,  
Wheel with thermoplastic polyurethane  
tread, with nylon wheel centre