

Product Data Sheet



BH-ALB 150K

EAN -

ID 917974

Pressed steel fixed castor, heavy duty brackets, with top plate fitting, Heavy duty wheel with Blickle Besthane® polyurethane tread, with aluminium wheel centre

Bracket:

Made of pressed steel. Bolted wheel axle. Zinc-plated, blue-passivated, Cr6-free.


Wheels:

Made of high-quality, reaction-injected polyurethane-elastomer Blickle Besthane®, low-noise operation, very low rolling resistance, high dynamic load capacity, good floor preservation, very high abrasion resistance, high cut and tear propagation resistance, very good chemical connection with the wheel centre.

Tread colours: brown

Wheel centre/rim: Made of die-cast aluminium. Casted tread.

Wheel centre colour: silver grey

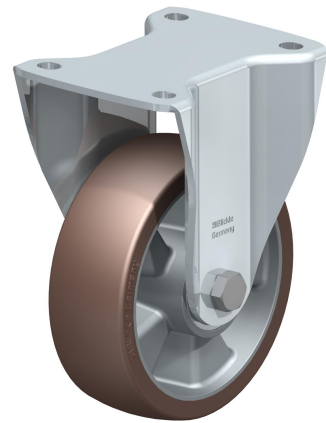

Rolling resistance

■■■■■ Excellent

Operating noise

■■■■□ Good

Floor surface preservation

■■■■□ Good

Product Data Sheet



Technical data

Plate size		140 x 110
Bolt hole spacing		105 x 75-80
Bolt hole Ø		11
Wheel Ø		150 mm (D)
Wheel width		50 mm (T2)
Load capacity		500 kg
Total height		197 mm (H)
Offset swivel castor		65 mm
Temperature resistance to		-25 ° C
Temperature resistance to		70 ° C
tread and tyre hardness		92° Shore A
Bearing type		Ball bearing